




FIREPLACE #130-3

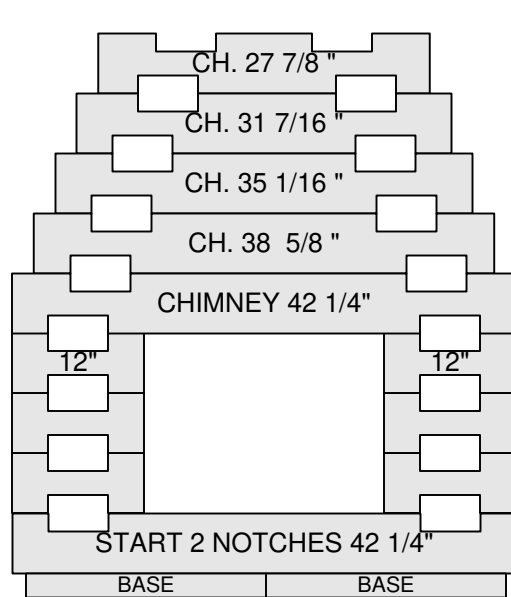


LEFT SIDE

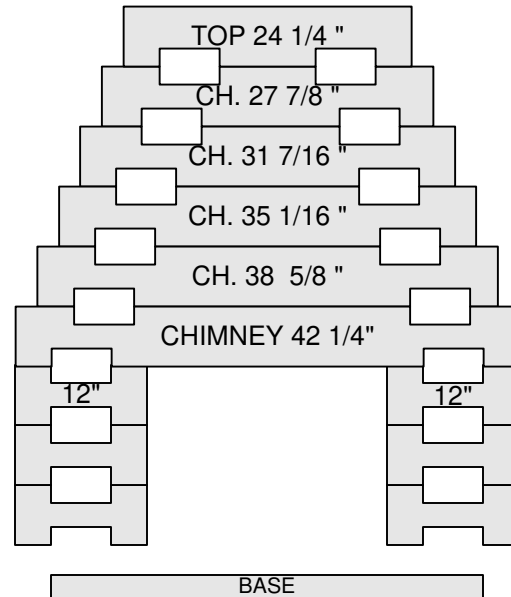


FRONT

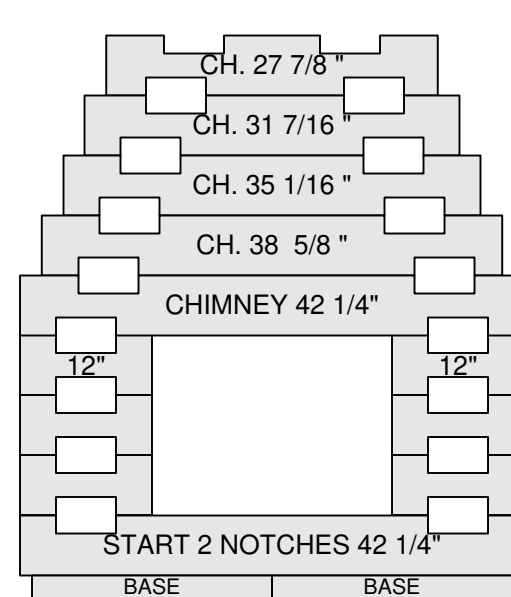

RIGHT SIDE

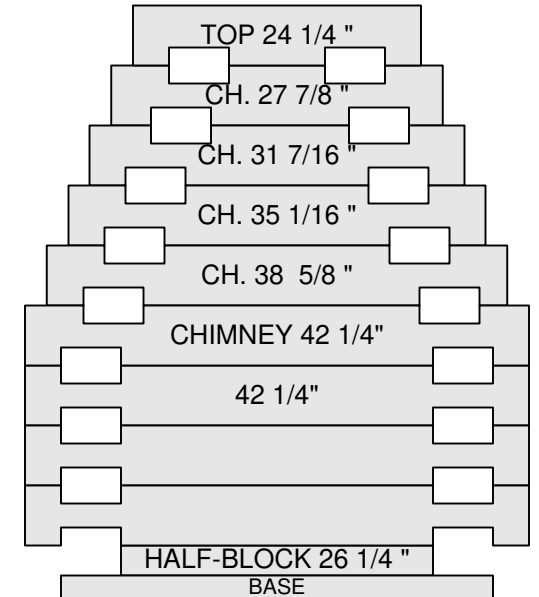

BACK

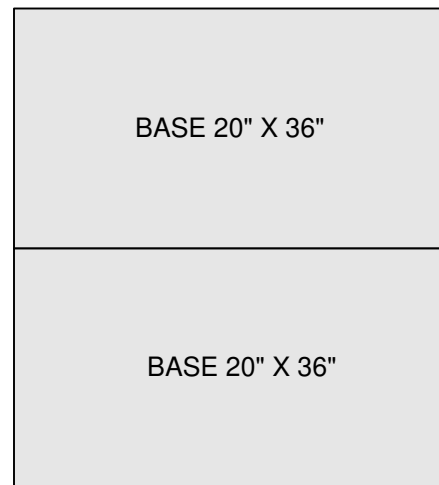

The flat side of each block must be put towards inside the fireplace. It is strongly recommended to apply a joint of silicone between every row of the chimney to prevent the smoke from escaping between the rows. Visit www.feuardent.com (Assembly section) for advices and assembly's pictures of your fireplace and the available accessories. For outdoor use only.



724, chemin Industriel, Lévis (Québec) G7A 1B5
 Tél. : (418) 831-1514 – Fax : (418) 831-1429
www.feuardent.com